

features & benefits

The Uno banner stand design is easily recognized as the market leader because of its versatility and ease of use. The all-aluminum construction makes the durable Uno a great value. Available in three popular widths. All kits include a carry bag with graphic storage.

Color: black

UNO: UN-1-ST

UNO 2: UN-2-ST (double sided)

UNO MEGA: UN-1-MG

UNO MONSTER: UN-1-MO

hardware specifications

	Width	Height
UNO	31.5" (800mm)	35" to 86" (889mm to 2184mm)
UNO2	31.5" (800mm)	35" to 86" (double sided) (889mm to 2184mm)
Mega UNO	36" (914mm)	35" to 86" (889mm to 2184mm)
Monster UNO	48" (1219mm)	35" to 86" (889mm to 2184mm)

Unit Footprint

UNO	31.75" x 14"	(806mm x 356mm)
UNO2	31.75" x 12.5"	(806mm x 318mm)
Mega UNO	36.25" x 14"	(921mm x 356mm)
Monster UNO	48.25" x 14"	(1226mm x 356mm)

graphic specifications

	Width	Height
UNO/ UNO2	31.5" (800mm)	34.5" up to 85.5" (876mm up to 2172mm) Plus Bleed
Mega UNO	35.5" (902mm)	34.5" up to 85.5" (876mm up to 2172mm) Plus Bleed
Monster UNO	48" (1219mm)	34.5" up to 85.5" (876mm up to 2172mm) Plus Bleed

Recommended Substrate: Dye-sub material, Vinyl, Scrim Vinyl, Flag material

Suitable for graphic thickness between .007" and .020" (.18mm and .50mm)

additional info

	Shipping dimensions	Weight
UNO	36" x 8" x 8" (915mm x 178mm x 178mm)	10 lbs
UNO2	36" x 7" x 7" (915mm x 178mm x 178mm)	11 lbs.
Mega UNO	42" x 7" x 7" (1067mm x 178mm x 178mm)	10 lbs.
Monster UNO	52" x 7" x 7" (1320mm x 178mm x 178mm)	12 lbs.

Bag Material: Black Nylon with red straps

Uno Assembly Instructions



Kit includes: 1 telescopic pole
1 weighted foot
1 top graphic rail
1 bottom graphic rail
1 2.5mm Allen wrench
Parts wrap
Carry case




Remove parts wrap from carry case. It will always be first out, and in last.



then remove graphic from carry case. Be sure graphic is rolled with image out, starting with the top rail so when graphic is rolled the top rail is inside of the roll.



Lay the rolled graphic on the floor so the back of the bottom rail is facing you. Then lock the weighted foot into the bottom graphic rail by pushing the foot into the rail recess and sliding (to the left) along the rail until it locks into position

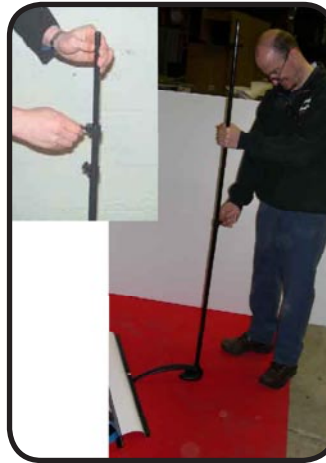

Place telescopic pole into base, loosen the thumb secure into position by locating screw for middle section and the top rail hole with the top of the extend the middle section so only about 2.5" remain in the lower section.



Loosen the thumb screw for the top section of the telescopic pole, extend it and put enough tension on the graphic so the unit will stand alone. Tighten the thumb screw.



Now your UNO is ready to use.

Reverse the procedure to disassemble